

TAURITM

Vaccine Verify




TAURI-Vaccine-Verify validates the vaccination status of visitors and customers who check into your business premises and venues. TAURI-Vaccine-Verify is the best instant results tool to check if your visitors have been vaccinated or not.

PRODUCT HIGHLIGHTS

- Integrated with State of California Digital Covid Record and European Commission Digital Covid Certification
- Body temperature check
- 3 sizes available
- Vaccine verification



Body Temperature Check

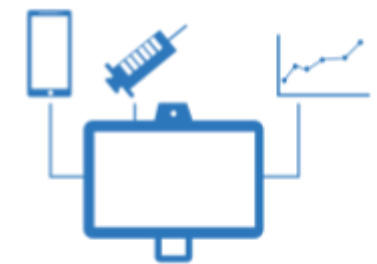

Integrated with State of California Digital Covid 19 Record and EU Digital Covid Certification



Vaccine verification



3 sizes available
10, 15 and 21 inch


TAURI™ vaccine verify

		GAD101-A Part#TAURIVV	NEB156 Part#TAURIVV	NEB215 Part#TAURIVV
Screen size		10"	15.6"	21.5"
Panel info.	Resolution	1280 x 800	1920 x 1080	
	Brightness	350 cd/m ²	250 cd/m ²	200 cd/m ²
	Contrast ratio	800:1		1000:1
	Aspect Ratio	16:10		16:9
	Active Display Area	134.8 x 216.2mm	344.16 x 193.59 mm	476.06 x 267.786 mm
	Viewing angle	H:170°/ V:170°		H:178°/ V:178°
	Touch Tech.	5 point cap touch (6H semi-tempered glass)		10 point cap touch (reflective glass)
	Hardware & OS	CPU	RK3288 Cortex A17, Quad core 1.8GHz	
	RAM	2GB DDR3		
	ROM	8GB eMMC Flash		
	OS	Android 7.1.2		
Software	TAURI features	Define temperature range for alert Adjust volume of alert sound OTA Feature Update Heat Map Generation Multi Language support Calibration Customize temperature result message Customize wear mask reminder message High temperature email notifications Face detection Optional facial recognition Access control via relay HDMI display output Dual monitor display Display signage Print results of scan Customize questionnaire		
Video/ Image	Video format	H.265, VP8, RV, WMV, AVS, H.263, MPEG4, HTML5, Flash 10		H.265, VP8, RV, WMV, AVS, H.263, MPEG4, Up to 4K x 2K decoding, HTML5, Flash 10
	Audio format	MP3/ WMA/ AAC etc.		
	Image format	JPEG, BMP, PNG		
Audio	Speaker	1W x 2	3W x 2	2W x 2
Communication	Bluetooth	EDR 4.2	EDR 4.2	EDR 4.2
	RFID	/		
	Wi-Fi	802.11 b/g/n/ac 2.4GHz and 5GHz		
	Ethernet	10/100 LAN		
General information	Color	Black		
	I/O	RJ45 x 1; USB x 1; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1. expandable 2 USB; HDMI	RJ45 x 1; USB x 2; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; GPIO Support; HDMI	RJ45 x 1; USB x 3; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; HDMI Recover x 1; RS232 x 2; GPIO Support
	AV capability	Front Facing Camera 2 MP fixed focus		
	Included in Box	Tablet, Power Adaptor, Power cable		
	Sensors	G-sensor		
	Consumption	11W	15W	32W
	Power input	12V 2A		12V 2.2A
	Operating Environment	Operating: 32°F to 104°F (0°C to 40°C); Storage: -4°F to 122°F (-20°C to 50°C) Operating: 20%-80%; Storage: 10%-95%		
	Certification	CE, FCC, ROHS, MiC		
	Language	Multi language		
	VESA	VESA 75	VESA 100	VESA 100
2D barcode sensor	Support standard	Support QR Code, EAN-8, EAN-13, ISBN-10, ISBN-13, CODE39, CODE93, CODE128, UPC, ITF, Code Bar		
	Scan distance	0-10cm		
	Scan direction	360°		
	Scan speed	50ms		
	Scan density	≥7mil		
Infrared temperature Sensor	Power input	3.3 – 3.6V, 50mA, USB connect		
	Temperature check distance	0.5m – 1m		
	Temperature check range	30°C - 45°C		
	Temperature check error	±0.3°C		

TAURI Stand and Mounts

	Small size	Medium size	Large size	Wall mount
SKU number	FIX-028	FIX-027	FIX-030	WM015012S
				
Compatible Devices	7, 10 & 15.6 inch	15.6 & 21.5 inch	10, 15.6 & 21.5 inch	10, 15.6 & 21.5 inch
Product weight	1.4kg	1.5kg	3.5kg	0.5kg
Dimension (product weight)	163 x 205 x 235mm	190 x 280 x 380 mm	320 x 260 x 465mm	120 x 150 x 10 mm
Dimension (Retail Packaging)	291 x 216 x 61mm	246 x 225 x 61mm	465 x 290 x 95mm	165x 135 x 26mm

Floor stand	
SKU number	FIX-031
Compatible Devices	7,10,15.6 & 21.5 inch
Product weight	9.5kg
Dimension (product)	1370 x 275 x 335 mm
Dimension (Retail Packaging includes two sets of floor stands)	2 sets of floor stand packaging. Three boxes in total. Box1: Stand body (1215 x 175 x 135 mm) Box2: Stand body (1215 x 175 x 135 mm) Box3: Stand base x2, Device mount x 2 (408 x 340 x 311 mm)

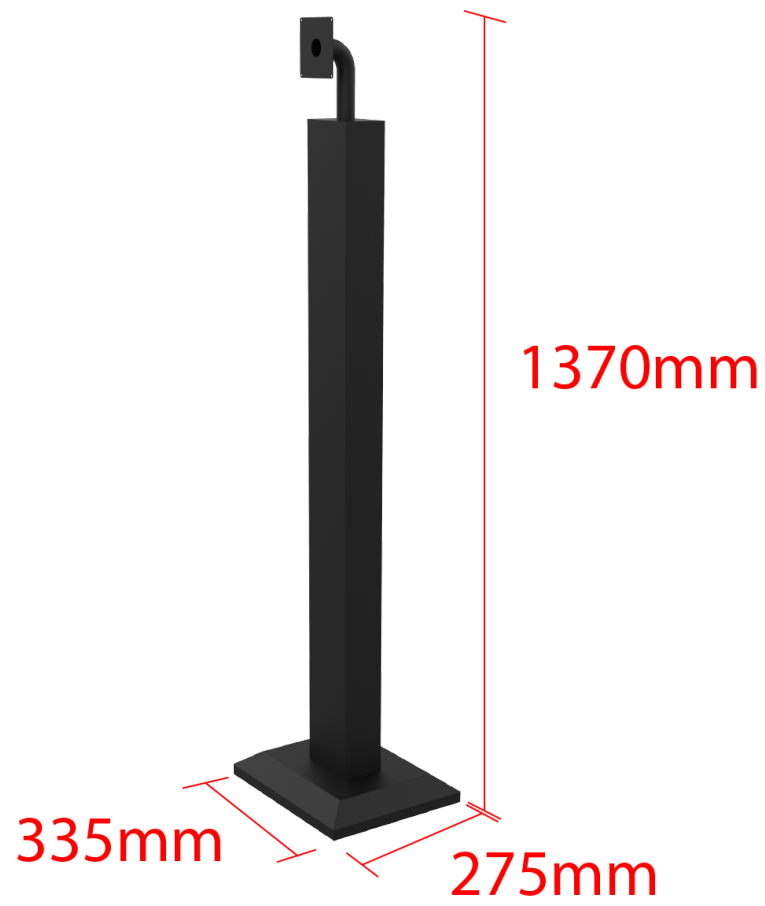

CONTACT US

United States	Hong Kong	Europe
Representative Office 1440 N Harbor Blvd Suite 900 Fullerton CA 92835 California,	Flat D, 5/F, Excelsior Building, 364 Nathan Road, Kowloon, Hong Kong	Weiherrstrasse 2 8564 Hattenhausen Switzerland
Representative New York, USA		
626 228 5927	852 23762803	44 20 3885 0392 (UK) 41 79 279 9798 (Switzerland)
sales@glorystargroup.com	sales@glorystargroup.com	sales@glorystargroup.com

To find out more about our extensive range of Glor Star solutions, go to www.glorystargroup.com, or call the office nearest you. For more information, please contact us at sales@glorystargroup.com. Glory Star reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Glory Star, the Glory Star logo, STAR CONTROL and STAROS are either trademarks or registered trademarks of Glory Star Group Limited. All other trademarks are the property of their respective owners.